




GESSMANN

Elektro-Trading sp. z o.o.
tel. (032) 734-55-72
et@elektro-trading.com.pl

Control pedestal for offshore U 22 / 32

2/160

2002

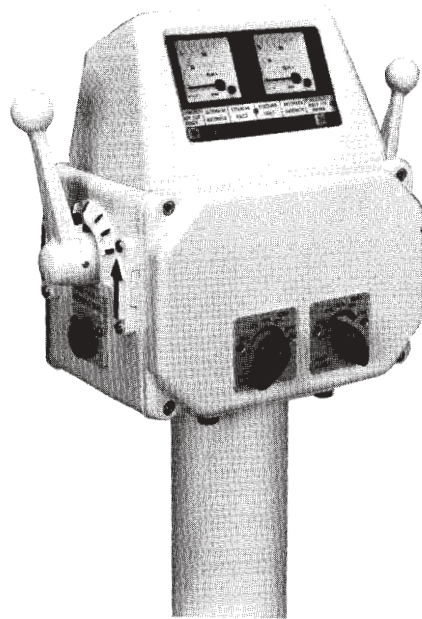

The control pedestal U 22/23 accomodates the devices necessary for control and monitoring.

Ready wired, it can be quickly and easily installed on the sea deck.
The housing (pedestal head) is made of seawater-resistant aluminium.

Contact complement 2 A 250 V AC 15 res. 1 A 24 V DC 13 (standard)
or 4 A 250 V AC 15 (special)

Surface treatment: Anti-corrosion primer, top coat: two coats of epoxy-resin paint, standard colour RAL 7032 pebble-gray

All non-painted metal parts are electrogalvanized and chromed.
All mechanical operating parts are made of non-rusting materials.

Permissible ambient temperature Operation -40° C to + 60° C
Storage -50° C to + 80° C

Climate resistance
Damp heat constant DIN IEC 68 part 2-3
Damp heat cyclic DIN IEC 68 part 2-30
Degree of protection IP 66 IEC 529 DIN 40050

Pos.		Type	Weight kg	Price EURO
1	Housing U 22 / 32 with 1 narrow side-plate with pillar-gasket	U22/32	6,8	
2	Side-plate narrow gasket	FD	1,8	
3	Side-plate wide with gasket (required for command and indicating devices Pos. 22-26)	HD	2,4	
4	Hinged side-plate with gasket that can be locked in position (cover for command and indicating devices)	KD	4,0	
5	Monitoring devices cover with gasket for max. 2 monitors 72 x 72 mm or 4 monitors 72 x 36 mm and max. 6 indicating devices Pos. 28, 29	IA	2,9	
6	Pillar 108 mm ø 670 mm hight with flange quadratic or round	RS	18,8	
10	Masterswitch with 6 contacts, with spring return in 0-position with ball handle and indicating labels drive	N61-03Z-HG	2,0	
11	Control-switches with 4 contacts with knob and indicating label	N62-02-KN	0,7	
12	Additional or subtract price each 2 contacts	± 01		
13	more variants look catalog 1/220			
14	Wire-wound potentiometer T 130 with centre tap linear life10 ⁷ switching cycles resistance 2 x 0,5 / 1 / 2 / 5 / 10 kOhm 1,5 Watt wiper current max. 10 mA	P	0,07	
15	more potentiometer look catalog 1/240...			
20	Heating 20 Watt 220 or 110 V / 50/60 HZ	H	0,15	
21	Mushroom head pushbutton latching 30 with indicating label 1 NO + 1 NC	PV	0,1	
22	Mushroom head pushbutton 30 with indicating label 1 NO + 1 NC	P	0,1	
23	Pushbutton 30 with indicating label 1 NO + 1 NC	D	0,1	
24	Selector switch 30 with indicating label 1 NO + 1 NC	W	0,1	
25	Indicator light 30 with indicating label 24 Volt	L	0,1	
26	Indicator light 30 with indicating label with transformer 220 / 24 Volt AC	L	0,1	
27	Contact block additional 1 NO + 1 NC			
28	Indicator light 22 with indicating label 24 Volt	L	0,05	
29	Indicator light 10 with indicating label 24 Volt	L	0,03	
35	Power monitoring PQ 72 1 mA DC Engraved your instructions	PQ	0,2	
36	Power monitoring PQ 72 x 36 1 mA DC Engraved your instructions	PQ	0,3	
37	Ampere monitoring EQ 72 100 / 200 / 1 A Engraved your instructions	EQ	0,2	
38	Ampere monitoring EQ 72 x 36 100 / 200 / 1 A Engraved your instructions	EQ	0,3	
39	Monitoring illuminated 24 Volt			
40	Another electrical value are available			
45	Terminal block 2,5 mm ² without wiring each terminal	KL		
46	Terminal block 2,5 mm ² with wiring wire 1,5 mm ² each terminal	KL		
47				
48				
49				
50	Engraved each 10 characters			



GESSMANN

Elektro-Trading sp. z o.o.
tel. (032) 734-55-72
et@elektro-trading.com.pl

Control pedestal for offshore U 22 / 32

2/161
2002

