

EMK 105 series



Aplicaciones

Filtro diseñado para niveles de interferencias altos. Con una amplia gama de intensidades.

Applications

Filter designed for high interference levels. With a wide range of intensities.

Características Principales

- De 1A a 10A
- Caja compacta con conexiones Faston 6.3
- Baja corriente de fugas 0.8mA

Features Include


- From 1A to 10A
- Compacted box with 6.3 Faston connection
- Low leakage current 0.8mA maximum

Características Features

TIPO TYPE	EMK 105 - 1	EMK 105 - 3	EMK 105 - 6	EMK 105 - 10
TENSION NOMINAL RATED VOLTAGE	250 VAC	250 VAC	250 VAC	250 VAC
INTENSIDAD NOMINAL RATED CURRENT	1 A	3 A	6 A	10 A
CORRIENTE DE FUGAS LEAKAGE CURRENT	0.8 mA MAX 250V	0.8 mA MAX 250V	0.8 mA MAX 250V	0.8 mA MAX 250V
TEST VOLTAJE	L/L	1450 VDC	1450 VDC	1450 VDC
	L/T	2250 VDC	2250 VDC	2250 VDC
AI SLAMI ENTO (250V DC) INSULATION RESIST. (250V DC)	100M MIN. 250V DC	100M MIN. 250V DC	100M MIN. 250V DC	100M MIN. 250V DC
MAX. RESISTENCIA D. MAX. DIRECT CURRENT RESIST.	0.5 MAX.	0.2 MAX.	0.15 MAX.	0.1 MAX.
INC. TEMPERATURA TEMPERATURE RANGE	30°C MAX.	30°C MAX.	30°C MAX.	30°C MAX.
TEMPERATURA DE TRABAJO OPERATING TEMPERATURE	-25 +85°C	-25 +85°C	-25 +85°C	-25 +85°C
ATENUACION ATTENUATION	COMMON M. 25 dB MIN	0.50 35 MHz	0.70 50 MHz	0.90 50 MHz
	DIFFERENTIAL M. 25 dB MIN	0.10 30 MHz	0.12 50 MHz	0.60 50 MHz





Circuito Eléctrico

Electrical Schematic

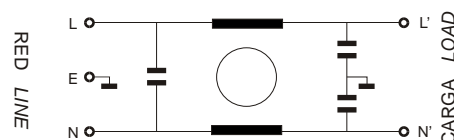

Perdidas de Inserción Insertion Loss

— Modo asimétrico Asymmetric mode
- - - - - Modo simétrico Symmetric mode



Dimensiones Dimensions

Dimensiones en mm.
Dimensions in mm.

