

# REMIO



**EUROTHERM  
CONTROLS**

## Communicating Interface



CE



# REMIO

## A new communications interface

Allows use of digital communications (Profibus-DP®, Modbus® and DeviceNet™) with the Eurotherm TE10S, 7100S, 425S TE200S and TE300 Solid State Contactors.

### Reducing your installation costs

Your control cabinet is sited some distance away from your process, and the cost of cabling represents a significant cost -

**REMIO** allows you to distribute your power units, bringing important benefits:

The length of power bearing cables is reduced

Only two wires are required to control and operate the power units.

Time proportioning of the Solid State Contactors is off loaded to the REMIO, thus freeing up valuable processing time to perform other tasks in PC or PLC™ based control system.


You wish to drive your heating elements using a conduction mode best suited to your application (short wave infrared, for example) -

**REMIO** allows use of two conduction modes for power units, Intelligent Half Cycling and Fast Cycling.


**REMIO**, using Fast Cycling, controls the Solid State Contactors like more expensive zero-fired SCR Power Controllers. Fast cycle firing is available to control single phase (TE10S), 425S and three phase (TE200S/TE300) loads.

You want to extend the life of your heating elements -

**REMIO**, using Intelligent Half Cycling (single phase loads only), reduces thermal shock to

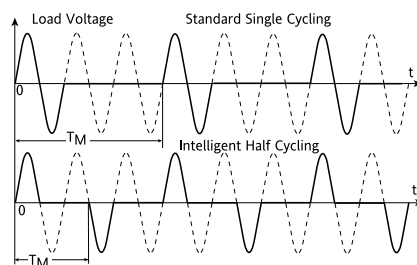

Example: 33% of Maximum Output

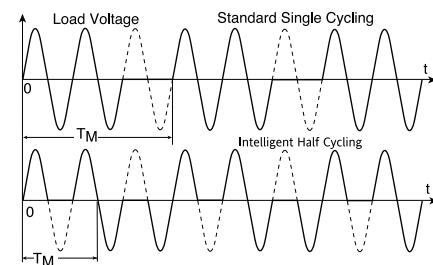

Example: 66% of Maximum Output

heating elements by reducing the OFF time and thereby lengthens their life.

PLC™ Digital output modules represent a high proportion of the cost of your system -

Replace them with a Modbus®, Profibus® or DeviceNet™ module and REMIO units. The

REMIO can have up to three digital I/O modules monitoring sixteen digital outputs per module or eight digital inputs and outputs.

The REMIO Range comprises 2 types of device:

## TECHNICAL SPECIFICATION

---

### Digital Interface

Base Digital Module  
1 logical Output port (8 Outputs)  
1 Configurable Port: 8 Outputs or 8 Inputs

Expansion Modules (Maximum of 2)  
1st Logic Module, configuration as base module  
2nd Logic Module, configuration as base module

Digital Outputs or Digital Inputs:  
20VDC Modulated, internal 6.5mA current limit  
8 Bit resolution  
Contact Closure Alarm  
+20VDC common, 6.5mA maximum  
Conduction Mode: On/Off

### Time Proportioning Output Unit (TPO)

---

Base TPO Module:  
2 ports - 16 time proportioned outputs

Expansion Modules (Maximum of 1, 32 outputs max.)  
Each with 2 ports, as Base Module (16 outputs).

TPO Output:  
20VDC Modulated with time proportioned output variable between 0 and 100% internal 10mA current limit  
8 bit resolution  
TPO Output Conduction mode  
Fast Cycling or Intelligent Half Cycling  
The choice is made by the power supply type to the REMIO unit:  
24VDC : fast cycling (8 periods on + 8 periods off at 50% output)  
24VAC : Intelligent Half Cycling

### Common Features

---

Communication Protocol: Profibus-DP®, Modbus® or DeviceNet™  
Transmission Speed:  
Profibus-DP®: up to 1.5Mbaud, with Auto Baud Rate detection  
Modbus®: 9600 or 19200 Baud (Configurable)  
DeviceNet™: 125Kbaud, 250Kbaud or 500Kbaud (Configurable)  
Diagnostics via front panel LEDs or Digital Communications  
PSU: 24VAC or 24VDC (24VA Maximum)  
User Voltage +24VDC available at all ports (for logic outputs)  
Removable Connector Blocks  
Configuration via DIN switches.  
Configurable Digital Communications address (via communications)  
DIN Rail or back of cabinet mountable  
Dimensions: 115mm (H), 92.5mm (D), base modules 87.5mm (W); with 1 expansion 105mm(W); with 2 expansions 122.5mm(W)

## ORDERING CODE - REMIO Communication interface

Basic product	Base Module	Expansion1		Protocol	Baud Rate	Manual Language	
REMIO							00

Module Type	Port Configuration	Base Module	Expansion 1	Expansion 2	Protocol	
Logic	Outputs/Inputs	D	-	-	Modbus® MOP	
	Outputs/Inputs	D	D	-	Profibus-DP® PFP	
	Outputs/Inputs and Alarm module or Outputs/Alarms	D	D	D	DeviceNet™ DNP	
Time Prop Output	Time Proportioned Output	TP	-	-	<b>Baud Rate</b>	
		TP	TP	-		Modbus® 9.6Kbaud 96
						19.2Kbaud 192
	Time Proportioned Output with Logic Inputs/Outputs	TP	TP	D	Profibus-DP® Automatic AUTO	
					DeviceNet™ 125Kbaud 125	
					250Kbaud 250	
					500Kbaud 500	

D: Digital Logic Module with the following configuration:  
16 Logic Outputs (20V) or 8 inputs and 8 logic outputs (20v)  
or in base position and in 1st expansion:

TP: Time proportioned Output module. 16 Time Proportioned Outputs  
(20V modulating 0 to 100%)

Manual Language	
English	ENG
French	FRA

Examples of coding:

Interface between 16 outputs and 16 inputs and a Profibus-DP® master control system, English manual  
**REMIO/D/D/PFP/ENG/00**

Time proportioned output for 32 TE10S units and a Modbus® supervisor, English Manual  
**REMIO/TP/TP/-/MOP/ENG/00**

### CONFIGURATION (By externally accessible DIP switches)

- D: Ports are configurable between logic inputs or logic outputs default configuration: logic outputs  
Modbus® baud rate 9600 or 19200 baud (default 9600)  
Bus termination (by default termination resistors not connected)
- TP: Modbus® baud rate 9600 or 19200 baud (default 9600)  
Bus termination (by default termination resistors not connected)

REMIO address: configured by digital communications. Default 32

#### EUROTHERM CONTROLS INC

741-F Miller Drive  
Leesburg, Virginia 20175-8993  
Phone: 703-443-0000  
Fax: 703-649-1300  
www.eurotherm.com

An Invensys company

© Copyright Eurotherm Controls Inc 2002

All rights strictly reserved. No part of this document may be stored in a retrieval system, or any form or by any means without prior written permission from Eurotherm Controls Inc. Every effort has been taken to ensure the accuracy of this specification. However, in order to maintain our technological lead we are continuously improving our products which could, without notice, result in amendments or omissions to this specification. We cannot accept responsibility for damage, injury, loss or expenses resulting therefrom.

Profibus® is a registered trademark of Profibus Trade Organization.  
DeviceNet™ is a trademark of Open DeviceNet Vendors Association.  
PLC™ is a trademark of Allen Bradley.

For more information contact your local representative: