

7100S

MODEL



Single Phase Solid State Contactor for use with Short Wave Infrared or Resistive Loads

Features:

- **Current range; from 16 to 630 amps at 45°C**
- **Voltage up 690V**
- **Inputs: Logic (AC or DC) or Analogue 4-20mA which gives time proportional output**
- **Intelligent half cycle firing available when driven by a Eurotherm REMIO interface unit**
- **Suitable for SWIR or resistive loads**
- **Overtemperature alarm for fan cooled units (over 100 amps)**
- **Options include thyristor short circuit alarm, Diagnostic Load Fault detection and digital communications**

A new range of single phase solid state contactors for use with short wave infrared (SWIR) and Low Temperature Coefficient resistive loads.

These units, with integral heat sinks, are driven by either DC or AC Logic signals depending on the order code. Also an analogue 4-20mA input can be specified which gives a linear time proportional output.

The DC Logic input can be supplied by a Eurotherm REMIO interface unit which can give intelligent half cycle firing to reduce flicker in SWIR lamps.

In all cases the output is zero voltage switching. High speed fuses are mounted external to the unit for 100 amps and below, internal above 100 amps. They can be ordered as part of the 7100S order code. Spare fuses or complete fuse and fuseholder assemblies can also be ordered separately.

The 7100S has an optional thyristor short circuit and total load failure alarm.

An overtemperature alarm will shut down a fan cooled unit if it overheats (units over 100 amps).

Diagnostic Load Failure detection is an option which alarms on the loss of one or more parallel heating elements (resistive or SWIR). The sensitivity is one out of six. It is auto-setting by command from a push button.


The Modbus communications option allows digital control of the unit and interrogation of alarm and firing status.



EUROTHERM

CONTROLS
PROCESS AUTOMATION
RECORDERS

7100s

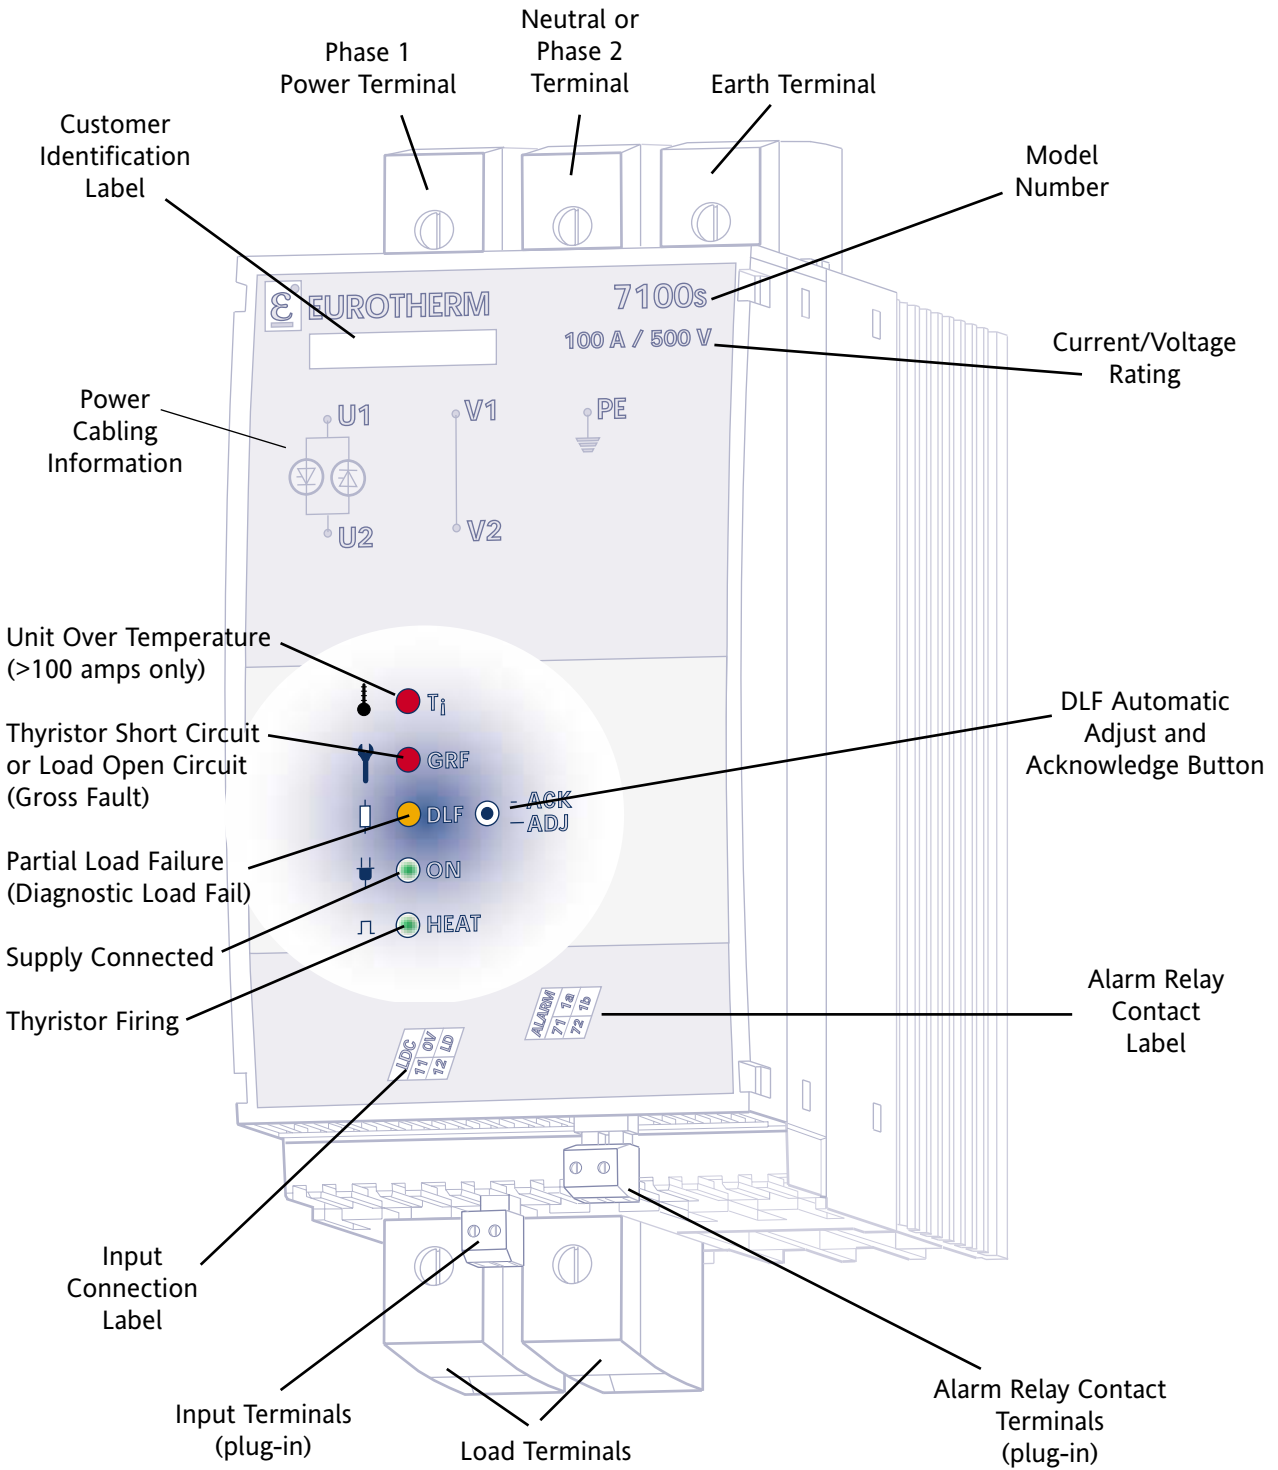

Technical specification (Phased introduction - Consult Eurotherm for availability)

ELECTRICAL RATINGS	
Current	16, 25, 40, 63, 80, 100 amps single phase at 45 Deg. C (will be extended up to 630 amps)
Voltage	127, 230, 277 and 500VAC (690VAC available later)
Frequency	47 to 63 Hz
AUXILIARY SUPPLY	No Auxiliary supply is required as the 7100S derives its own internal, synchronised supply
FAN SUPPLY	None required up to 100 amps (natural convection). Above 100amps; 115V or 230V (10VA)
FUSES	High speed fuses are external for thyristor ratings up to and including 100 amps - will be internal above 100amps The fuses can be called up as part of the ordering code
LOAD	Low Temperature Coefficient resistive or short wave infrared (SWIR), single phase loads. The load can be switched Line to Neutral or Line to Line - select appropriate voltage
INPUT	DC Logic (LDC) 4.5 to 32 VDC (ON > 4.5V, OFF < 2V) or (ON > 9mA, OFF < 0.5mA) AC Logic (HAC) 100 to 230VAC (ON > 85VAC, OFF < 10VAC) 253VAC maximum. Impedance 7K at 50 Hz DC analogue (ATP) 4-20mA (10VDC max.)
FIRING MODE	For Logic inputs the firing is ON/OFF with zero voltage switching. Intelligent half cycle firing available if input is from a Eurotherm REMIO interface unit. For analogue 4-20mA input the firing mode is Fast Cycle firing. The cycle time at 50% demand is 0.6 seconds (0.3 seconds ON and 0.3 seconds OFF). Output linearity + or - 2%. Open loop control (no supply voltage compensation)
INDICATION	Green LED for supply 'ON'. Green LED for Heat 'ON'. Future development will give a full range of diagnostic indicators
ALARMS	Available later
COMMUNICATIONS	Optional Modbus communications will be available, running at 96kbaud or 192kb allow the units to be controlled and monitored by a supervisory system
ENVIRONMENT	
Humidity	5 to 95% Non condensing, non streaming
Pollution	Pollution degree 2
Enclosure protection.	IP20 without additional protection
Temperature	Operating: 0 to 45 Deg. C. (2,000 metres maximum altitude). Storage: -10 to 70 Deg. C
Cooling	Natural convection up to 100 amps, fan cooled >100amps
Heat dissipation	Allow 2 watts per amp to include heat dissipation from fuse (if used)
Safety standards	Installation category 3 (voltage transients must not exceed 4.0 kV)
INSTALLATION	
Mounting.	DIN Rail or panel mounting (two DIN rails for 80 and 100 amp outputs) Allow a minimum of 10mm between units. Units must be mounted with fins running vertically
Max. cable size.	16 and 25 amp: 6mm ² . 40 and 63 amp: 16mm ² . 80 and 100 amp: 35mm ²
CE MARKING	
7100S units installed and used according to user instructions comply with the requirements of the European Low Voltage Directive73/23EEC (93/68 EEC) and product standard EN60947-3. This enables the installation in which the products are used to be declared compliant with the EMC directive, as regards the 7100S units.	

Dimensions (mm)

16A:	156(H) x 35(W) x 110(D)
25A:	156 x 35 x 140
40A:	156 x 52.5 x 140
63A:	156 x 70 x 160
80-100A:	226 x 96 x 164

Wiring


Isolation and protection circuit installed by user

High speed fuse for thyristor protection

Power terminals (cage)
Supply: U1 and V1
Load: U2 and V2
Earth: PE

Input terminals and label

No	LDC	HAC	ATP
11	0V	A1	0V
12	LD	A2	RI

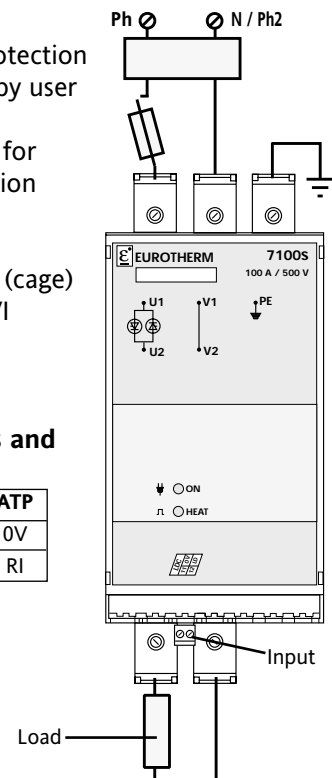

Ordering code (Phased introduction - Consult Eurotherm for availability)

7100S	1	2	3	4	5	6	7	8
	9	10	11	12	13	14		

1 Current <table border="1"> <tr><td>16A</td><td>16 amps</td></tr> <tr><td>25A</td><td>25 amps</td></tr> <tr><td>40A</td><td>40 amps</td></tr> <tr><td>63A</td><td>63 amps</td></tr> <tr><td>80A</td><td>80 amps</td></tr> <tr><td>100A</td><td>100 amps</td></tr> <tr><td>125A</td><td>125 amps</td></tr> <tr><td>150A</td><td>150 amps</td></tr> <tr><td>200A</td><td>200 amps</td></tr> <tr><td>250A</td><td>250 amps</td></tr> <tr><td>315A</td><td>315 amps</td></tr> <tr><td>400A</td><td>400 amps</td></tr> <tr><td>500A</td><td>500 amps</td></tr> <tr><td>630A</td><td>630 amps</td></tr> </table>	16A	16 amps	25A	25 amps	40A	40 amps	63A	63 amps	80A	80 amps	100A	100 amps	125A	125 amps	150A	150 amps	200A	200 amps	250A	250 amps	315A	315 amps	400A	400 amps	500A	500 amps	630A	630 amps	3 Filter <table border="1"> <tr><td>FILT</td><td>16 to 40A (std)</td></tr> <tr><td></td><td>63 to 100A: with filter</td></tr> <tr><td>FILT</td><td>with filter</td></tr> <tr><td>NONE</td><td>without filter</td></tr> <tr><td>NONE</td><td>above 100A</td></tr> </table>	FILT	16 to 40A (std)		63 to 100A: with filter	FILT	with filter	NONE	without filter	NONE	above 100A	6 Input <table border="1"> <tr><td>LDC</td><td>DC logic</td></tr> <tr><td>HAC</td><td>AC logic</td></tr> <tr><td>ATP</td><td>DC 4-20mA (fast cycle firing)</td></tr> </table>	LDC	DC logic	HAC	AC logic	ATP	DC 4-20mA (fast cycle firing)	9 Alarm option <table border="1"> <tr><td>GRF</td><td>Thyristor short circuit or load open circuit</td></tr> <tr><td>DLF</td><td>Thermal cut-out (above 100amps) Partial load failure + GRF</td></tr> <tr><td>NONE</td><td>No alarms</td></tr> </table>	GRF	Thyristor short circuit or load open circuit	DLF	Thermal cut-out (above 100amps) Partial load failure + GRF	NONE	No alarms	11 Alarm Relay Contacts <table border="1"> <tr><td colspan="2">For alarm option GRF or DLF:</td></tr> <tr><td>NO</td><td>Open in alarm</td></tr> <tr><td>NC</td><td>Closed in alarm</td></tr> <tr><td>XX</td><td>If alarm choice 'none'</td></tr> </table>	For alarm option GRF or DLF:		NO	Open in alarm	NC	Closed in alarm	XX	If alarm choice 'none'	13 Baud Rate <table border="1"> <tr><td>9K6</td><td>96 kbaud</td></tr> <tr><td>19K2</td><td>192 kbaud</td></tr> <tr><td>XXX</td><td>No comms</td></tr> </table>	9K6	96 kbaud	19K2	192 kbaud	XXX	No comms
16A	16 amps																																																																				
25A	25 amps																																																																				
40A	40 amps																																																																				
63A	63 amps																																																																				
80A	80 amps																																																																				
100A	100 amps																																																																				
125A	125 amps																																																																				
150A	150 amps																																																																				
200A	200 amps																																																																				
250A	250 amps																																																																				
315A	315 amps																																																																				
400A	400 amps																																																																				
500A	500 amps																																																																				
630A	630 amps																																																																				
FILT	16 to 40A (std)																																																																				
	63 to 100A: with filter																																																																				
FILT	with filter																																																																				
NONE	without filter																																																																				
NONE	above 100A																																																																				
LDC	DC logic																																																																				
HAC	AC logic																																																																				
ATP	DC 4-20mA (fast cycle firing)																																																																				
GRF	Thyristor short circuit or load open circuit																																																																				
DLF	Thermal cut-out (above 100amps) Partial load failure + GRF																																																																				
NONE	No alarms																																																																				
For alarm option GRF or DLF:																																																																					
NO	Open in alarm																																																																				
NC	Closed in alarm																																																																				
XX	If alarm choice 'none'																																																																				
9K6	96 kbaud																																																																				
19K2	192 kbaud																																																																				
XXX	No comms																																																																				
2 Voltage <table border="1"> <tr><td>127V</td><td>127 volts</td></tr> <tr><td>230V</td><td>230 volts</td></tr> <tr><td>277V</td><td>277 volts</td></tr> <tr><td>500V</td><td>500 volts</td></tr> <tr><td>690V</td><td>690 volts</td></tr> </table>	127V	127 volts	230V	230 volts	277V	277 volts	500V	500 volts	690V	690 volts	4 Fan Supply <table border="1"> <tr><td>XXXX</td><td>16A to 100A (no fan)</td></tr> <tr><td>115V</td><td>115V Fan supply</td></tr> <tr><td>230V</td><td>230V Fan supply</td></tr> </table>	XXXX	16A to 100A (no fan)	115V	115V Fan supply	230V	230V Fan supply	7 Manual Language <table border="1"> <tr><td>ENG</td><td>English</td></tr> <tr><td>FRA</td><td>French</td></tr> <tr><td>GER</td><td>German</td></tr> </table>	ENG	English	FRA	French	GER	German	10 Load type <table border="1"> <tr><td colspan="2">For alarm option DLF:</td></tr> <tr><td>LTCL</td><td>Resistive</td></tr> <tr><td>SWIR</td><td>Short Wave Infrared</td></tr> <tr><td>XXXX</td><td>If 'DLF' not specified</td></tr> </table>	For alarm option DLF:		LTCL	Resistive	SWIR	Short Wave Infrared	XXXX	If 'DLF' not specified	12 Communications option <table border="1"> <tr><td>MOP</td><td>Modbus protocol</td></tr> <tr><td>NONE</td><td>No comms</td></tr> </table>	MOP	Modbus protocol	NONE	No comms	14 Certificate option <table border="1"> <tr><td>NONE</td><td>No certificate of conformity</td></tr> <tr><td>CFMC</td><td>Certificate of conformity</td></tr> </table>	NONE	No certificate of conformity	CFMC	Certificate of conformity																										
127V	127 volts																																																																				
230V	230 volts																																																																				
277V	277 volts																																																																				
500V	500 volts																																																																				
690V	690 volts																																																																				
XXXX	16A to 100A (no fan)																																																																				
115V	115V Fan supply																																																																				
230V	230V Fan supply																																																																				
ENG	English																																																																				
FRA	French																																																																				
GER	German																																																																				
For alarm option DLF:																																																																					
LTCL	Resistive																																																																				
SWIR	Short Wave Infrared																																																																				
XXXX	If 'DLF' not specified																																																																				
MOP	Modbus protocol																																																																				
NONE	No comms																																																																				
NONE	No certificate of conformity																																																																				
CFMC	Certificate of conformity																																																																				
5 Fuse <table border="1"> <tr><td>FUSE</td><td>Fuse without microswitch External ≤100A Internal >100A</td></tr> <tr><td>MSFU</td><td>Fuse with microswitch</td></tr> <tr><td>NONE</td><td>No fuse (or SWIR)</td></tr> </table>	FUSE	Fuse without microswitch External ≤100A Internal >100A	MSFU	Fuse with microswitch	NONE	No fuse (or SWIR)	8 Options <table border="1"> <tr><td>NONE</td><td>(end of code)</td></tr> <tr><td>YES</td><td>(specify further code)</td></tr> </table>	NONE	(end of code)	YES	(specify further code)																																																										
FUSE	Fuse without microswitch External ≤100A Internal >100A																																																																				
MSFU	Fuse with microswitch																																																																				
NONE	No fuse (or SWIR)																																																																				
NONE	(end of code)																																																																				
YES	(specify further code)																																																																				

SPARE FUSES AND HOLDERS - External up to and including 100 amps

Current rating amps	Fuse rating amps	Fuse number	Fuse and holder assembly
16	20	CH260024	FU1038/16A/00
25	32	CH260034	FU1038/25A/00
40	50	CH330054	FU1451/40A/00
63	80	CS173087U080	FU2258/63A/00
80	100	CS173087U100	FU2258/80A/00
100	125	CS173246U125	FU2760/100A/00

EUROTHERM LIMITED <http://www.eurotherm.co.uk>

UK SALES OFFICE
Eurotherm Ltd
 Faraday Close, Durrington, Worthing, BN13 3PL
 United Kingdom
 Sales and support: Tel. +44 (0)1903 695888
 Fax +44 (0)1903 695666
email: info@eurotherm.co.uk
http://www.eurotherm.co.uk

U.S. OFFICE
Eurotherm Inc.
 741 Miller Drive SE,
 Suite F,
 Leesburg,
 VA 20175-8993
 Telephone Leesburg (+1 703) 443 0000
 Fax (+1 703) 669 1300
http://www.eurotherm.com

© Copyright Eurotherm Limited 2001

All rights strictly reserved. No part of this document may be stored in a retrieval system, or any form or by any means without prior written permission from Eurotherm Limited. Every effort has been taken to ensure the accuracy of this specification. However in order to maintain our technological lead we are continuously improving our products which could, without notice, result in amendments or omissions to this specification. We cannot accept responsibility for damage, injury loss or expenses resulting therefrom.

